



U.S. Patents 8404076, 8887578, & 9677921.  
Japanese Patent 5602884. Other patents pending.

## Key Features

- Fluid measurement performance is independent of fluid properties – eliminating the need to calibrate on different fluids
- Accuracy unaffected by flow regime (e.g. laminar or turbulent flow) or variations in flow velocity profile
- Sensors operate and measure in two-phase flow conditions with gas volumetric void fractions in excess of 30%

## Applications

- Highly corrosive chemicals
- CMP Slurries or solutions containing solid contents and/or bubbles
- Pure water or ultra high purity chemicals
- Fluids with varying density or viscosity

# CPFM-8800 High Purity Coriolis Mass Flow Meter

All-PFA wetted Coriolis flow meter  
designed for measuring liquids in  
high-purity applications

## Description

The Malema Sensors® CPFM-8800 series is a family of advanced flow meters based on the Coriolis principle. The fluid path is fabricated exclusively from PFA (Perfluoroalkoxy) polymeric material.

CPFM-8800 series flow meters are comprised of two assemblies – one containing the sensor, the other containing the supporting electronics. The sensors are specially designed for measuring liquids in high-purity semiconductor, bio-pharmaceutical and other applications that require all PFA-wetted surfaces and provide a Mass Flow Rate, Total Mass and Temperature.

## Measurement Principle

Fluid flows into the sensor consisting of two flow sensitive elements which are vibrated relative to one another - similar to the tines of a tuning fork. Fluid interacts with the sensor dynamically in such a way that the sensor's response is immune to the fluid's chemical and physical properties flow regime, or variations in flow velocity profile. Fluid mass flow rate is determined by measuring the relative motion and frequency of the flow-sensitive elements.

### Measurement Specifications

<b>Accuracy</b>	$\pm 1\%$ of rate (flow rates between 100-10% of MRV) $\pm 1\%$ of rate $\pm$ Z.O.S (flow rates below 10% of MRV)
<b>Temperature</b>	Ambient: 0–50°C Fluid: 18–50°C*
<b>Operating Pressure</b>	80 psig (Max.)

\* Consult factory for higher temperature applicaitons.

Model	Measurement Range		Zero Offset Stability (Z.O.S)
	Minimum Range Value	Maximum Range Value (MRV)	
8803-1	50 g/min	1,500 g/min	2 g/min
8803-2	150 g/min	4,000 g/min	3 g/min

### Electrical Specifications

<b>Supply Voltage</b>	24V DC $\pm$ 10%
<b>Power Consumption</b>	Max 6 W
<b>Programming</b>	Operator Parameter configuration through USB interface with a PC
<b>Output Interfaces</b>	4–20 mA Current Loop, Digital I/O
<b>Analog Output Module</b>	4–20 mA ; 500 Ohms max load
<b>Digital Input/Output Module</b>	Configurable as Frequency or Digital I/O
<b>Frequency Output</b>	0–10 kHz proportional to flow rate

### Physical Specifications


<b>Process Connections</b>	1/4" or 3/8" tube connection *
<b>Wetted Material</b>	Daikin 211 SH (Similar to Perfluoroalkoxy (PFA) 440)
<b>Sensor Dimensions</b>	Mini option: 104 mm (L) x 40 mm (W) x 204 mm (H)
<b>Transmitter Dimension</b>	Display option: 155 mm (L) x 50 mm (W) x 179 mm (H)
<b>Weight</b>	Sensor: 0.72 kg; Transmitter: 0.65 kg
<b>Cable Length</b>	Standard 3 m; Maximum up to 30 m (cable length between sensor and electronics assemblies)

\* Consult the factory for other process connection requirements.

## Dimensional Drawings

FOR REFERENCE ONLY

Model CPM-8803-1 with 1/4" fluid connection and Mini sensor option illustrated.

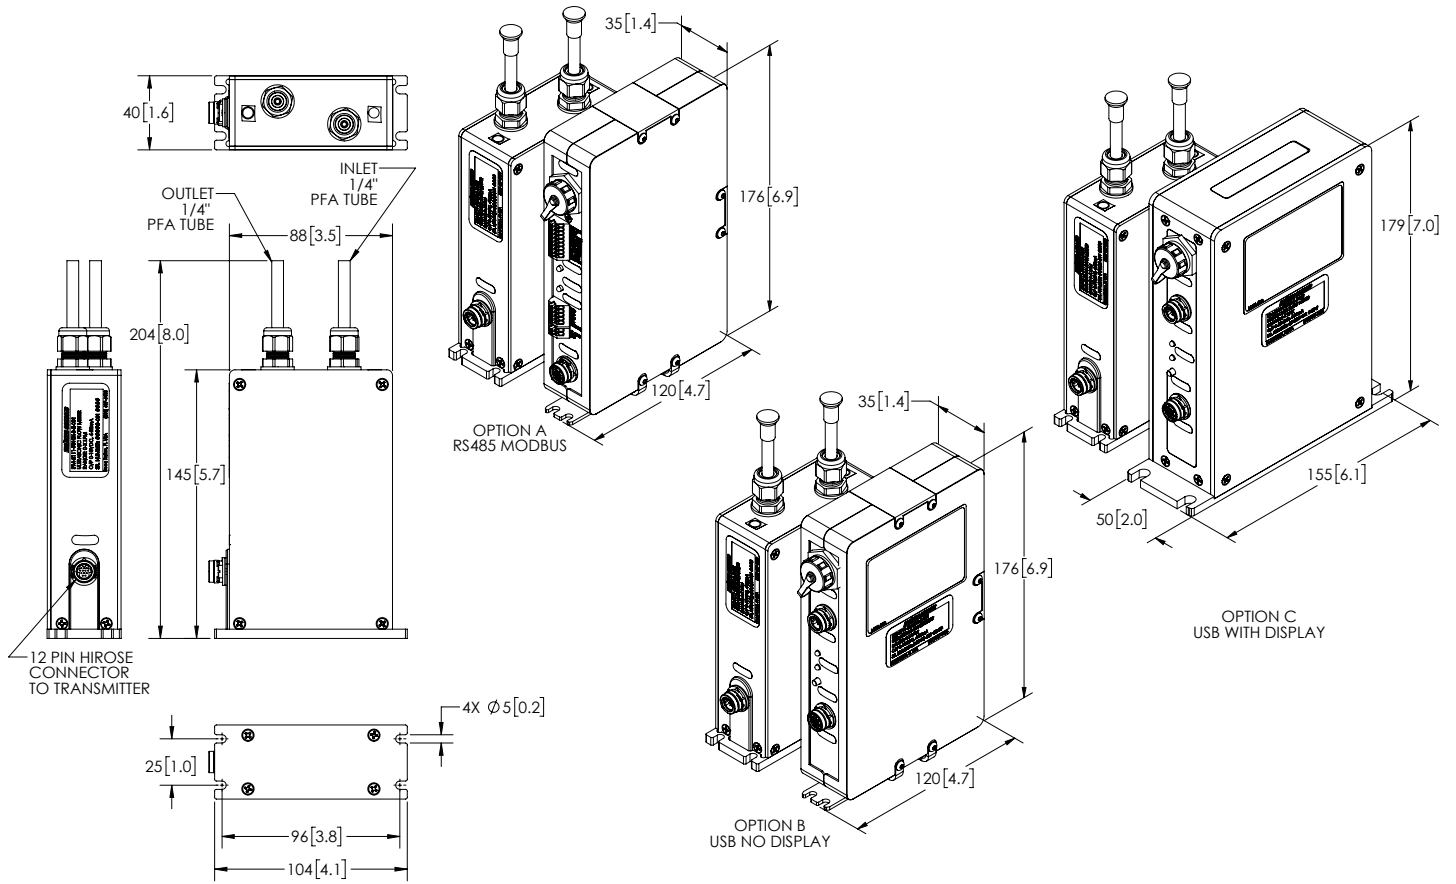

Model Ordering Code											Description
CPFM-	8803-*	-	*	*	-	**	X	X	*	-***	
Range Code	8803-1										50–1500 g/min
	8803-2										150–4000 g/min
		-									
Display			D								With Local LCD Display
			N								Without Display
Process Connection Size			2								1/4" OD
			3								3/8" OD
Process Connection Type			T								Tube Ends (Standard)
			Z								Custom (Consult Factory)
Interconnecting Cable Length			03								3 m
			05								5 m
			ZZ								Custom Length (30 m Max.)
Reserved							X				
Reserved								X			
Sensor Space Saver Option									X		Standard Size
									M		Mini Size Option
										-XXX	Unique PN Identifier

© 2022 Malema Engineering Corporation. All rights reserved.

Malema Sensors is a registered trademark of Malema Engineering Corporation. Malema, the Malema logo, and Malema Engineering Corporation are trademarks of Malema Engineering Corporation. All other trademarks are property of their respective owners.

Malema supplies this publication for informational purposes only. While every effort has been made to ensure accuracy, this publication is not intended to make performance claims or process recommendations. Malema does not warrant, guarantee, or assume any legal liability for the accuracy, completeness, timeliness, reliability, or usefulness of any information, product, or process described herein. We reserve the right to modify or improve the designs or specifications of our products at any time without notice. For actual product information and recommendations, please contact your local Malema representative.

**Corporate Headquarters**

1060 S Rogers Circle  
Boca Raton, FL 33487  
P: (561) 995-0595 F: (561) 995-0622

**West Coast Headquarters**

2329 Zanker Road  
San Jose, CA 95131  
P: (408) 970-3419 F: (408) 970-3426

**Asia Pacific Headquarters**

35 Marsiling Industrial Estate Road 3, # 02-06  
Singapore 739257  
P: +65 6482 3533 F: +65 6484 4231